JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

TO-92L Plastic-Encapsulate Transistors

TPT5609 TRANSISTOR (NPN)

TO-92L



1. EMITTER
2. COLLECTOR
3. BASE

FEATURES

- Excellent Linearity of Current Gain
- Low saturation voltage
- Complementary to TPT5610

MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector- Base Voltage	25	V
V_{CEO}	Collector-Emitter Voltage	20	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	1	A
P_C	Collector Power Dissipation	0.75	W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-55-150	℃

ELECTRICAL CHARACTERISTICS (T_a=25℃ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	I_C =10μA, I_E=0	25			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	I_C =1mA, I_B=0	20			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	I_E=10μA, I_C=0	5			V
Collector cut-off current	I_{CBO}	V_{CB}=20V, I_E=0			1	μA
Emitter cut-off current	I_{EBO}	V_{EB}=5V, I_C=0			1	μA
DC current gain	h_{FE}	V_{CE}=2V, I_C=500mA	60		240	
Collector-emitter saturation voltage	$V_{CE(sat)}$	I_C=800mA, I_B=80mA			0.5	V
Base-emitter voltage	V_{BE}	V_{CE}=2V, I_C=500mA			1	V
Transition frequency	f_T	V_{CE}=2V, I_C=500mA		190		MHz
Collector output capacitance	C_{ob}	V_{CB}=10V, I_E=0, f=1MHz		22		pF

CLASSIFICATION OF h_{FE}

Rank	A	B	C
Range	60-120	85-170	120-240

Typical Characteristics

Static Characteristic

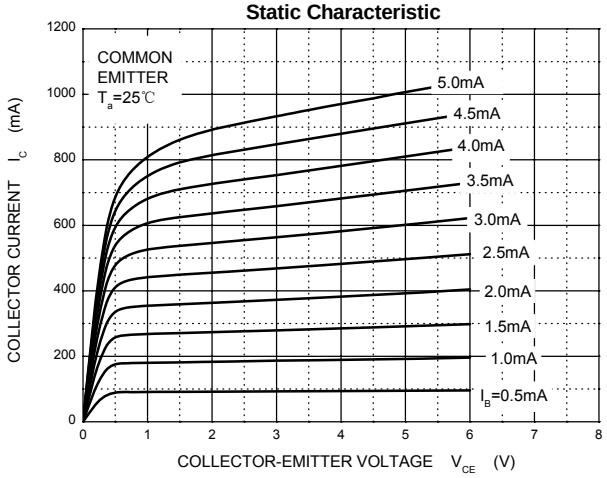

h_{FE} —— I_C

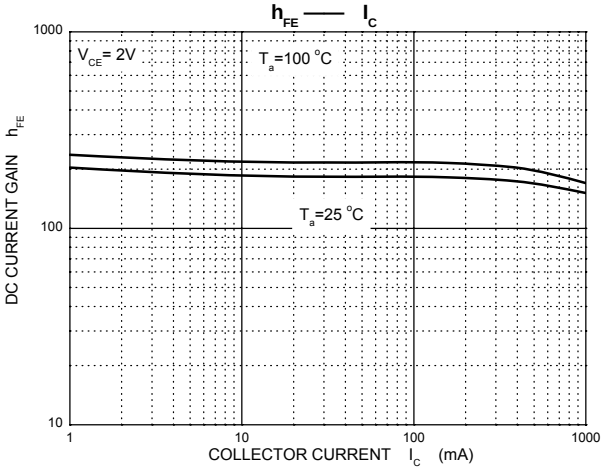

V_{BEsat} —— I_C

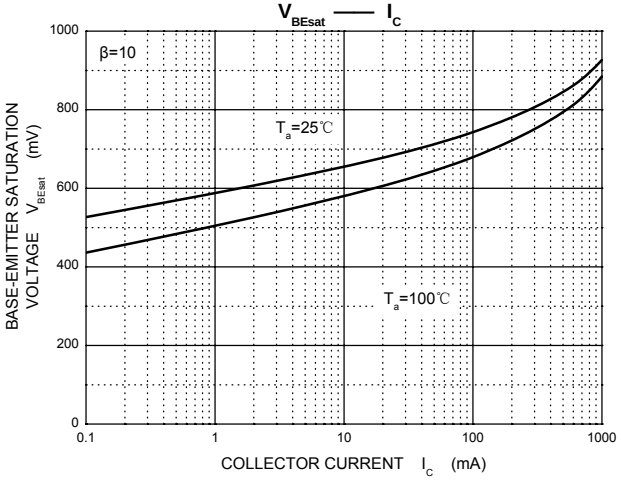

V_{CEsat} —— I_C

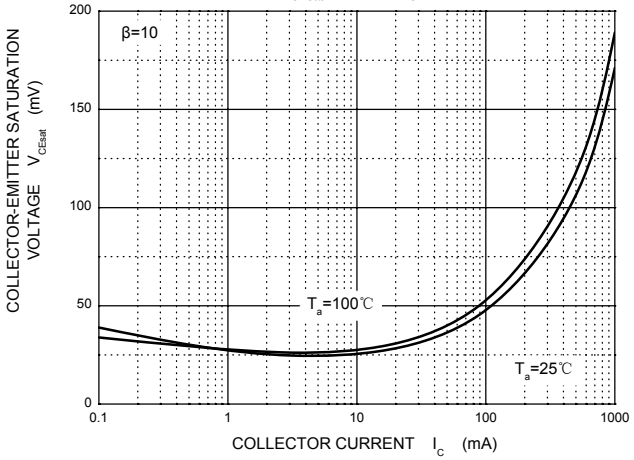

f_T —— I_C

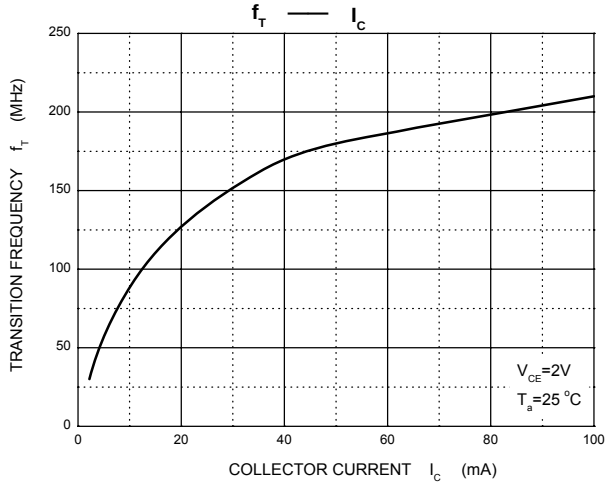

C_{ob} / C_{ib} —— V_{CB} / V_{EB}

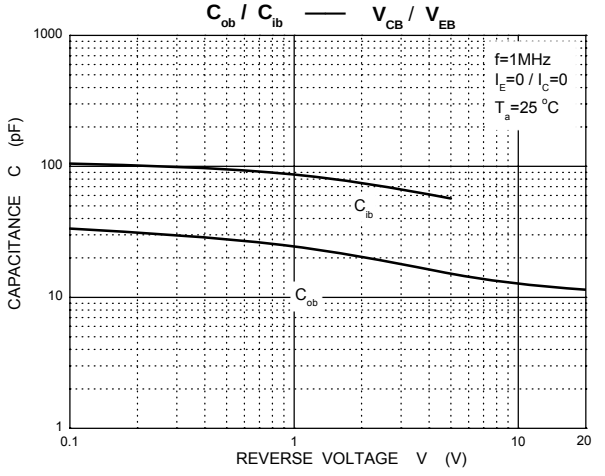

I_C —— V_{BE}

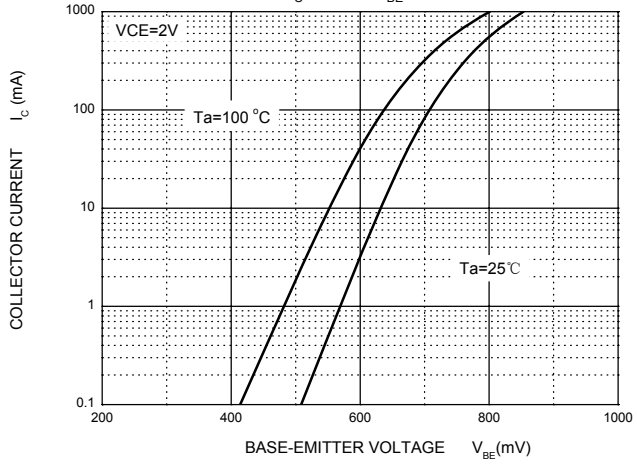

P_c —— T_a

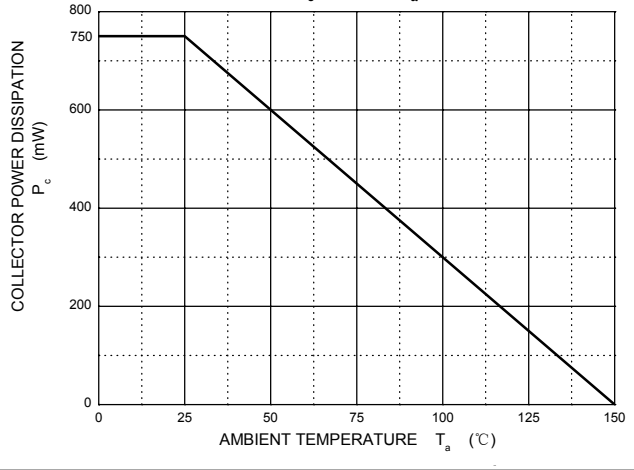

TO-92L Package Outline Dimensions



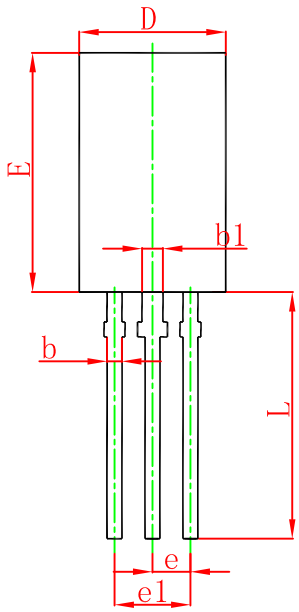

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	3.750	4.050	0.148	0.159
A1	1.280	1.580	0.050	0.062
b	0.380	0.550	0.015	0.022
b1	0.620	0.780	0.024	0.031
c	0.350	0.450	0.014	0.018
D	4.750	5.050	0.187	0.199
D1	4.000		0.157	
E	7.850	8.150	0.309	0.321
e	1.270 TYP.		0.050 TYP.	
e1	2.440	2.640	0.096	0.104
L	13.800	14.200	0.543	0.559
Φ		1.600		0.063
h	0.000	0.300	0.000	0.012

TO-92L Suggested Pad Layout

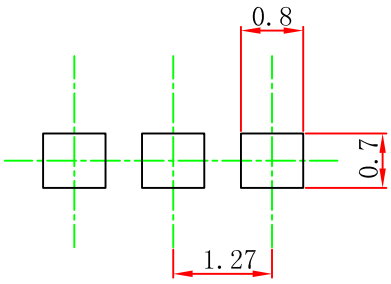

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

JCET reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein.JCET does not assume any liability arising out of the application or use of any product described herein.

TO-92L PACKAGE TAPEING DIMENSION

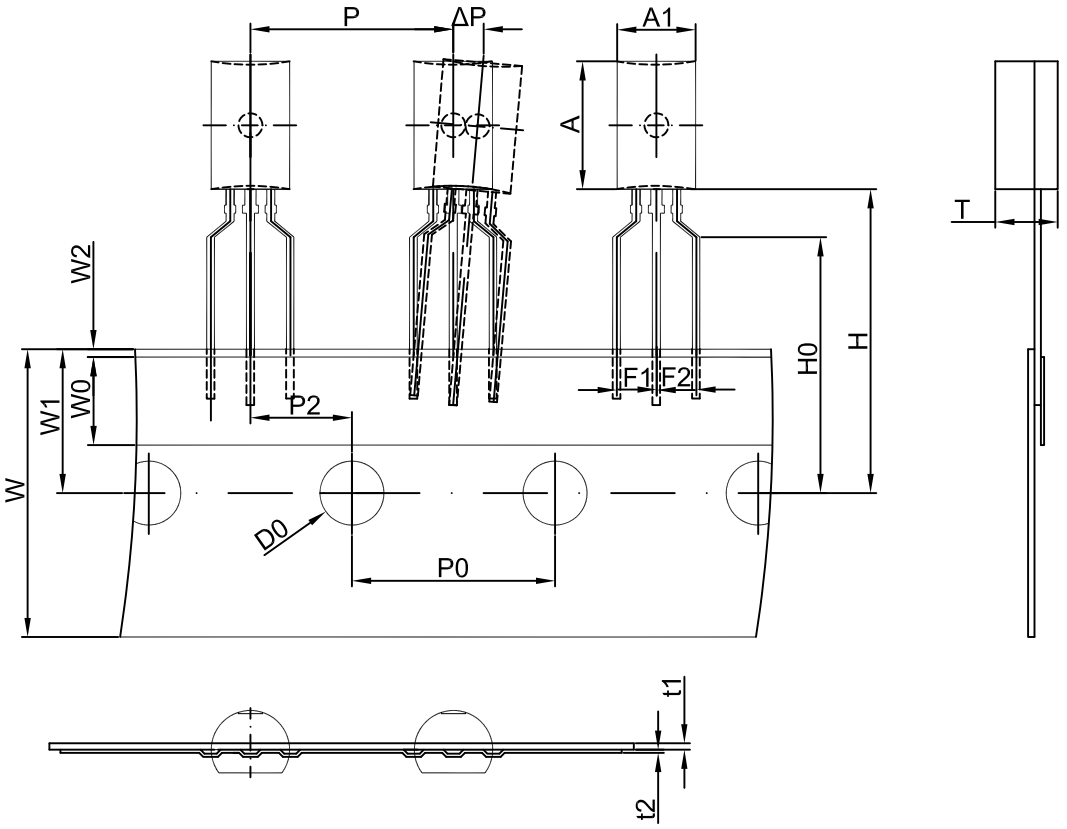

Dimiensions are in millimeter								
A1	A	T	P	P0	P2	F1	F2	W
4.9±0.15	8.0±0.15	3.9±0.15	12.7±0.3	12.7±0.2	6.35±0.3	2.5±0.3	2.5±0.3	18.0+1.0/-0.5
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0±0.5	9.0±0.5	1.0 MAX.	19.0+2.0/-1.0	16.0±0.5	4.0±0.2	0.4±0.05	0.2±0.05	0 ± 1.0

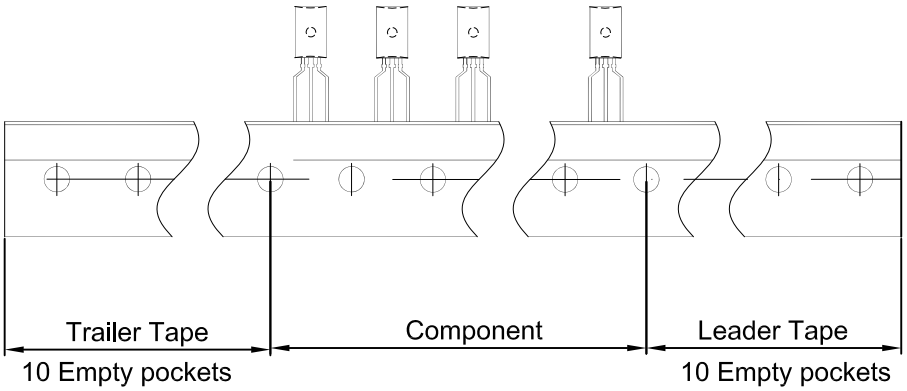

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92L	2000 pcs	333×203×42	20,000 pcs	493×400×264